


# ROUTERBUDDY

## UPS V5

Uninterruptible Power Bank

RBU12V5 / RBU15V5

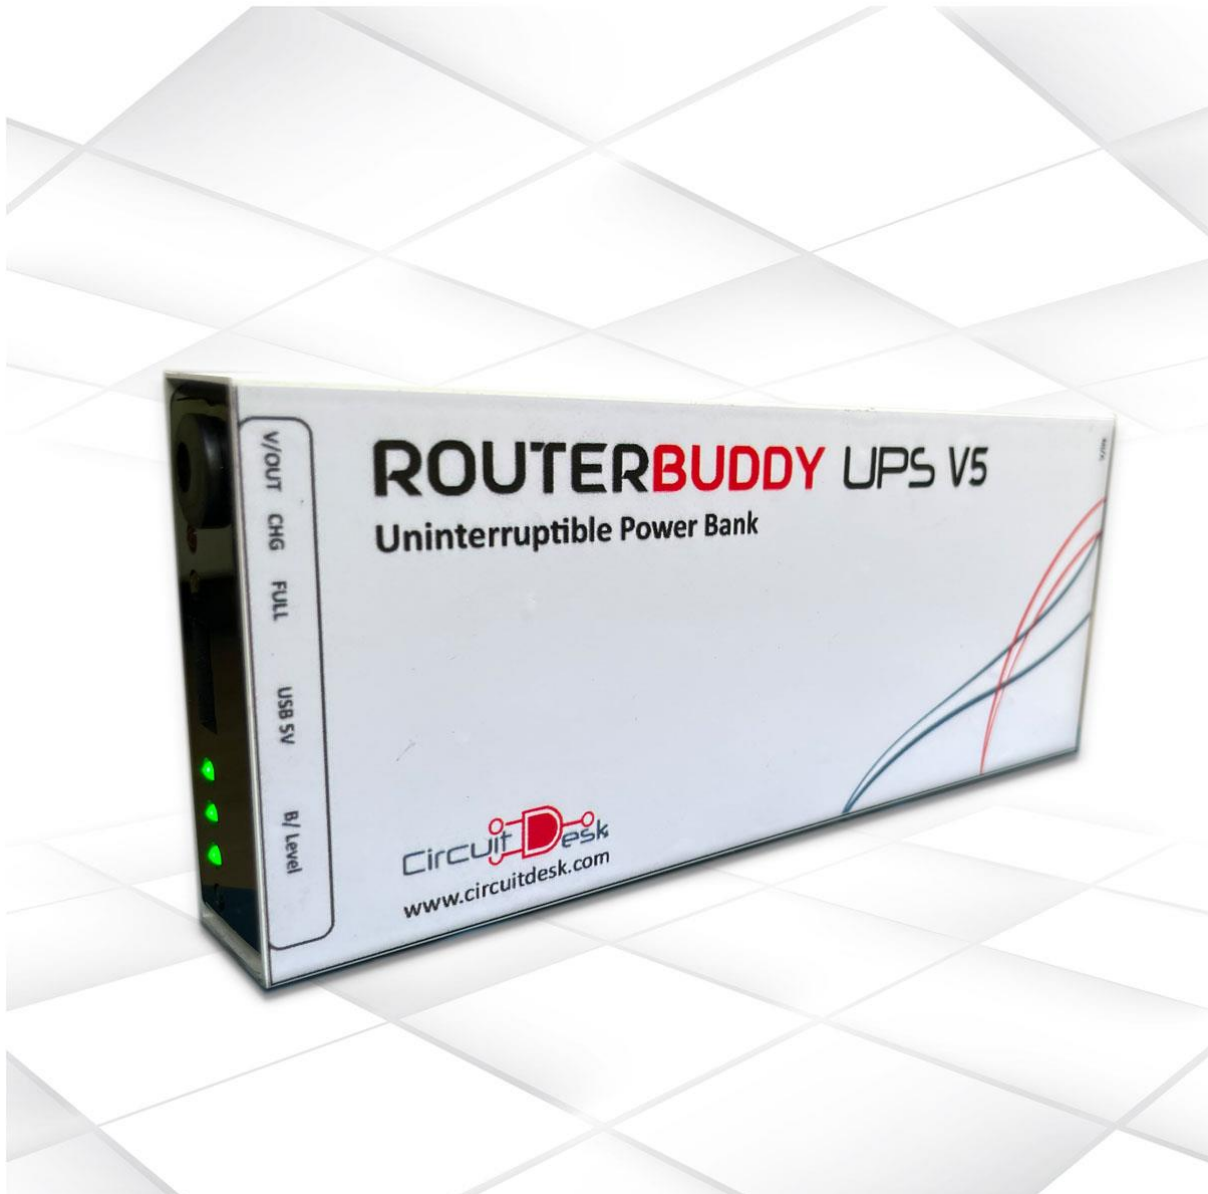

## Introduction:


Designed and developed for Sri Lankans by Sri Lankan Engineers at Circuit Desk maintaining the highest quality and employing the latest and intelligent technology, RouterBuddy UPS V5 is a set and forget uninterruptible power bank that allows you to use devices whilst on the move, so you continue working wherever you are. powering up your device in just a few minutes, It can continuously provide power at peak performance even when there are sudden power outages. It will keep your router running for six or more\* hours without interruption.

With the built in USB port, you can use RouterBuddy UPS V5 as a portable power bank to charge your 5V devices such as mobile phone or the tab,

Equipped with a 4-level battery level indicator, keep up-to-date with remaining battery capacity RouterBuddy UPS V5 allows you to gauge the run time with ease.


RouterBuddy UPS V5 employees 4 levels of intelligent protection system ensuring safe and hassle-free operation

## Device Overview:

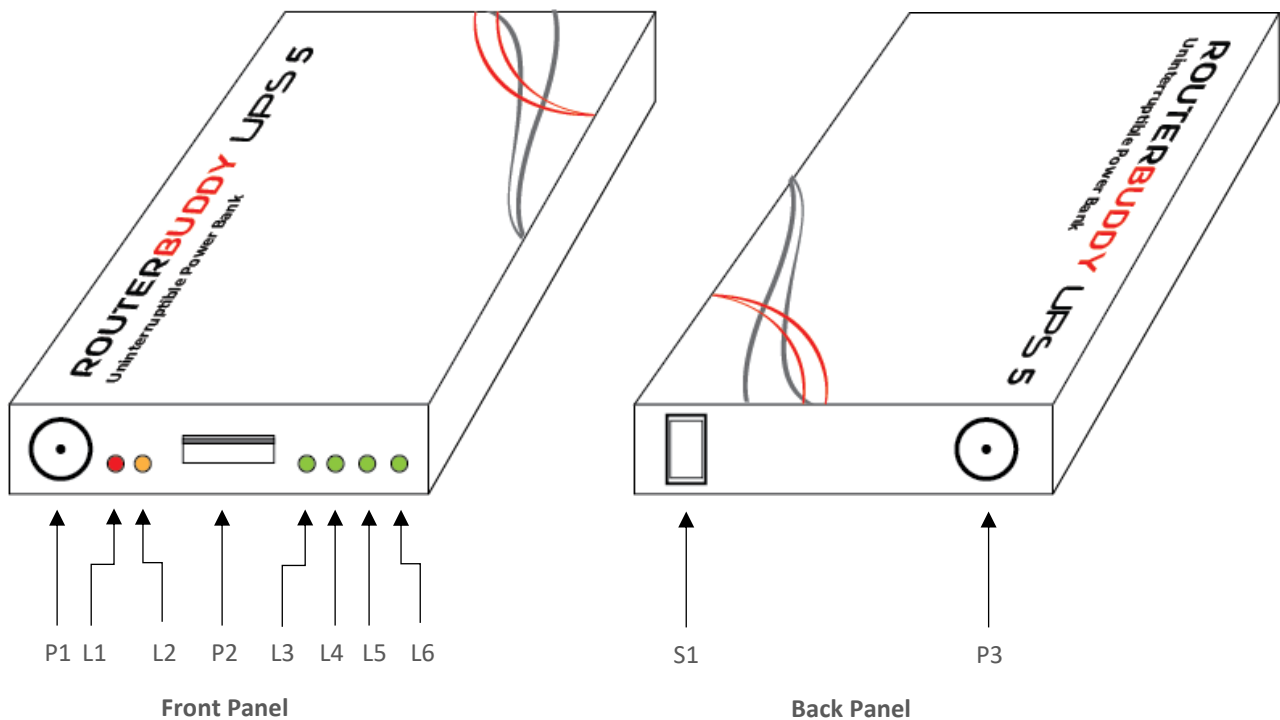

Charge Status Indicator	L1	Charging
	L2	Charge complete
Battery Level Indicator	L3	0 % - 25%
	L4	25 % - 50%
	L5	50 % - 75%
	L6	75 % - 100%
Power Ports	P1	Power Out (12V / 15V)
	P2	USB Out (5V)
	P3	Power In (12V 2A)
Switch	S1	Power Switch

Set up in 3 easy steps:

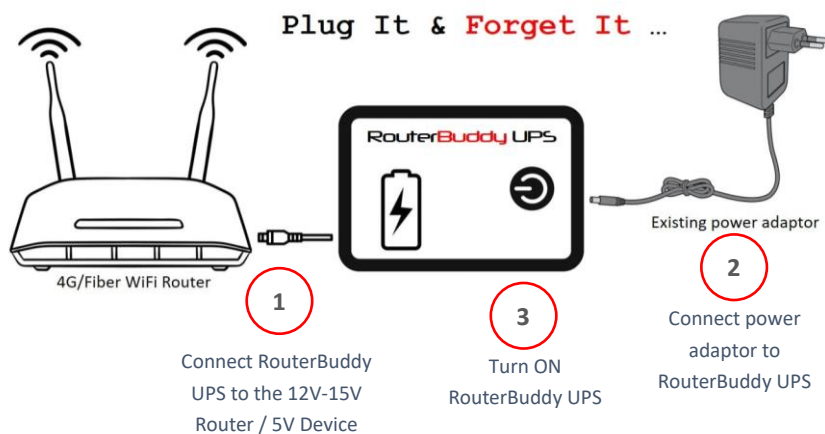

Specification:

	RBU12V5	RBU15V5
<b>Voltage In</b>	12V DC	12V DC
<b>Voltage Out</b>	12V DC / 5V DC USB	15V DC / 5V DC USB
<b>Power Out USB</b>	5V 1A	5V 1A
<b>Peak Power</b>	18W	15W
<b>Vin Port</b>	2.1mm DC	2.1mm DC
<b>Vout Connector</b>	2.1mm DC / USB -A	2.1mm DC / USB -A
<b>Battery Technology</b>	Li-Ion	Li-Ion
<b>Battery Capacity</b>	32.5Wh	32.5Wh

Note:

- \*Run time may vary based on the Router and its power consumption. Figure shown here is based on the routers tested.
- Device will time to time go in to charge state to keep battery fully charged. This is normal operation